

10400 Series

Press-fit Connectors, PC/104 Female Connectors





Contacts	Copper alloy, sel. Plated Au over Ni	Current Rating	3A AC. DC
Terminals	press fit	Insulation Resistance	1000M Min.
Housing	PBT+30%Glass Fiber UL 94 V0	Withstand Voltage	1500V AC/Mminute
Temperature Range	-40°C to +105°C	Contact Resistant	20m
Voltage Rating	250V AC. Maximum		

MECHANICAL CHARACTERISTICS:

Contact Positions:40
 Contact Resistance Force:200g Maximum per pin
 Contact Separation Force:25g Minimum per pin

MECHANICAL CHARACTERISTICS:

Contact Positions:64
 Contact Resistance Force:200g Maximum per pin
 Contact Separation Force:25g Minimum per pin

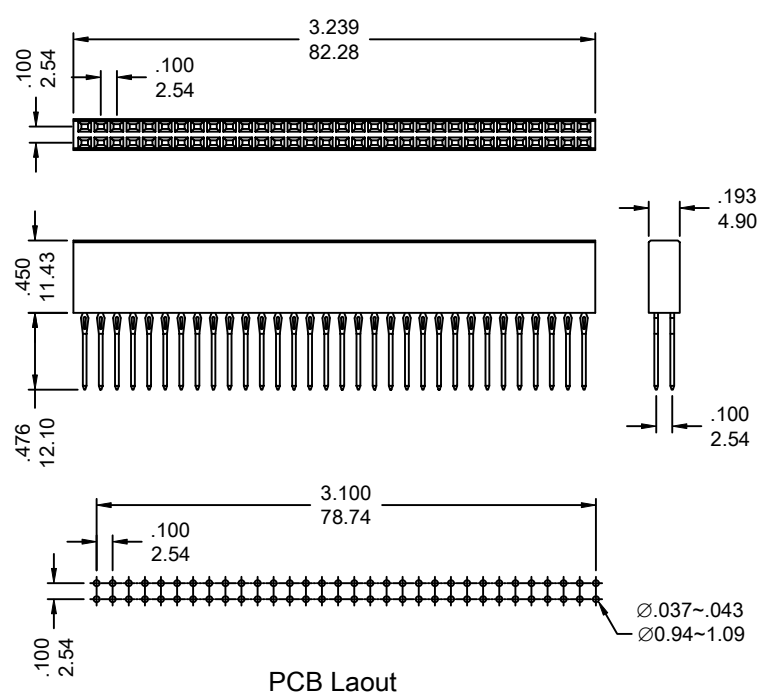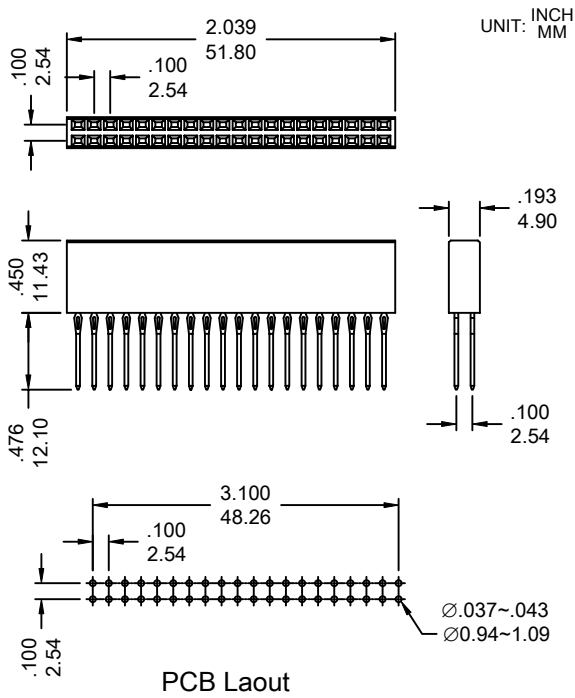

10401 Series

