



# .118" (3.00mm) Dual Row Header

## 13045 Series


### FEATURES:

- . 2-24 Circuits
- . High temperature LCP, [UL 94V-0]
- . Plating: Tin , select Glod
- . Contact: Brass

### SPECIFICATIONS:

- . Current rating: 5A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperatur range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand Voltage: 1500V AC/minute

UNIT: INCH  
MM

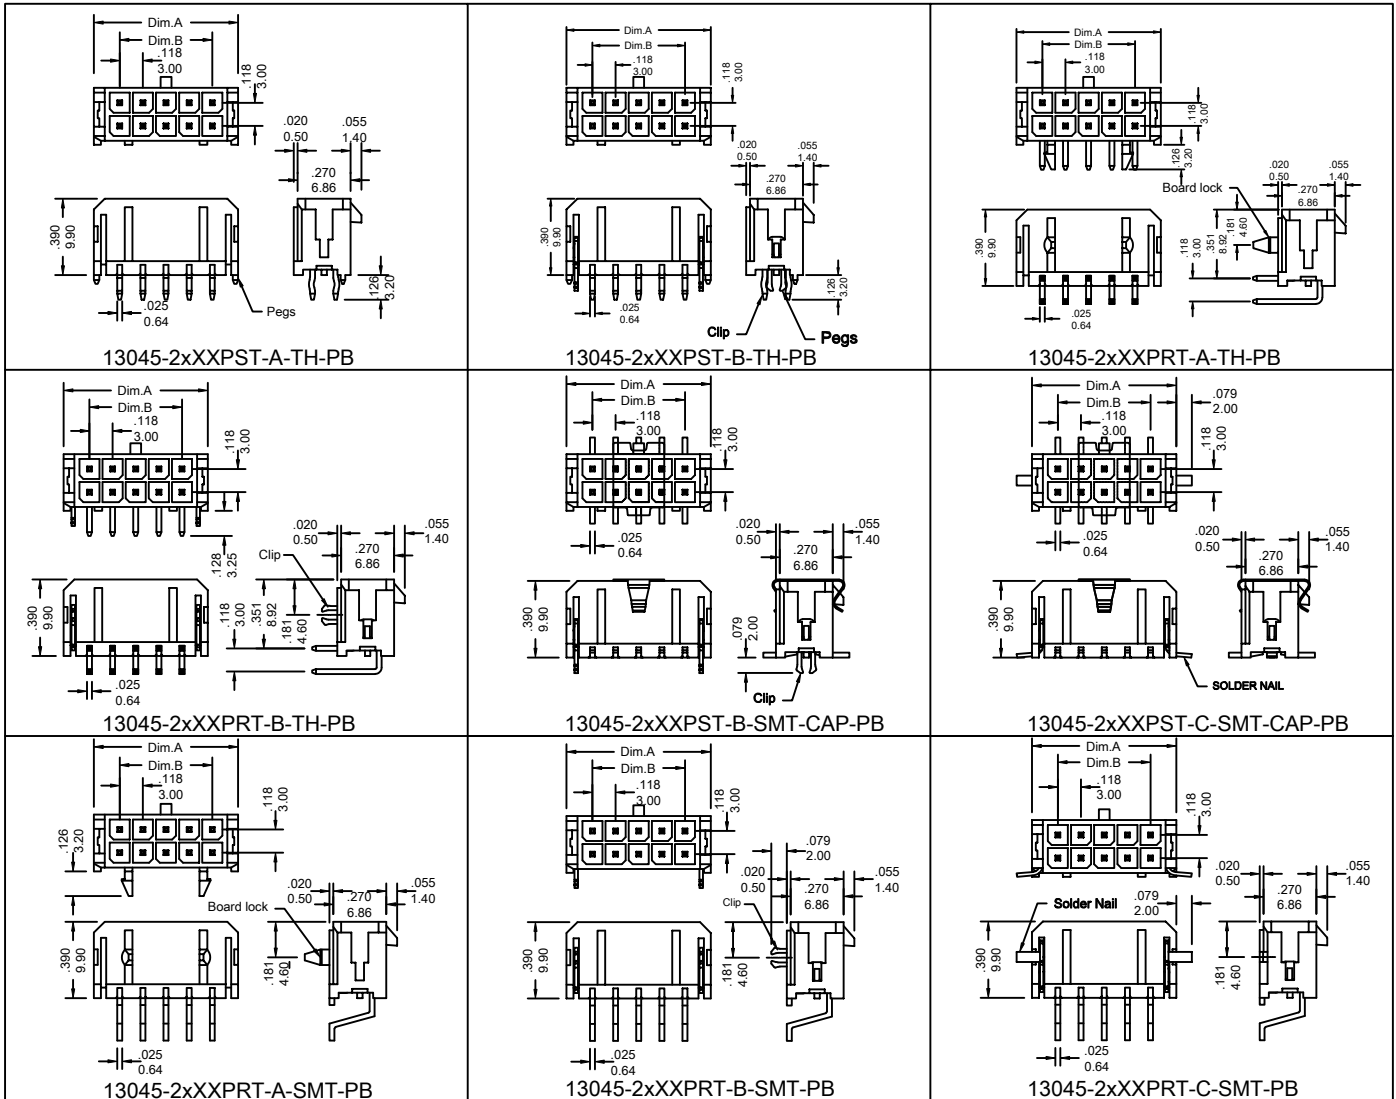

## Ordering Information 13045 Series

Series No.	No. of Contacts	Contact Type	Contact Plating	Other Options	P.C.B Mount		
13045	- 2X01P	S	T	- B	- SMT	- CAP	- PB
13045 Series	2X01P ~ 2X12P	S: STRAIGHT R: RIGHT ANGLE	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	A: Straight with Pegs : Right Angle with Board Lock B: Straight with Pegs / Clip : Right Angle with Clip C: Straight with Solder Nail : Right Angle with Solder Nail	TH: Through Type SMT: SMT Type	With CAP	RoHs
* PIN LENGTH CAN BE CHANGED TO CUSTOM'S SPECIFICATION							

## Dimensional Information

Circuits	Dim.A± <sup>.008</sup> <sub>0.20</sub>	Dim.B± <sup>.008</sup> <sub>0.20</sub>	Circuits	Dim.A± <sup>.008</sup> <sub>0.20</sub>	Dim.B± <sup>.008</sup> <sub>0.20</sub>	Circuits	Dim.A± <sup>.008</sup> <sub>0.20</sub>	Dim.B± <sup>.008</sup> <sub>0.20</sub>	Circuits	Dim.A± <sup>.008</sup> <sub>0.20</sub>	Dim.B± <sup>.008</sup> <sub>0.20</sub>
2	.262 6.65		4	.380 9.65	.118 3.00	6	.498 12.65	.236 6.00	8	.616 15.65	.354 9.00
10	.734 18.65	.472 12.00	12	.852 21.65	.591 15.00	14	.971 24.65	.709 18.00	16	1.089 27.65	.827 21.00
18	1.207 30.65	.945 24.00	20	1.325 33.65	1.063 27.00	22	1.443 36.65	1.181 30.00	24	1.561 39.65	1.299 33.00