



.118" (3.00mm) Single Row Header

13650 Series


FEATURES:

- . 2-12 Circuits
- . High temperature LCP, [UL 94V-0]
- . Plating: Tin , select Glod
- . Contact: Brass

SPECIFICATIONS:

- . Current rating: 5A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperatur range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand Voltage: 1500V AC/minute

UNIT: INCH
MM

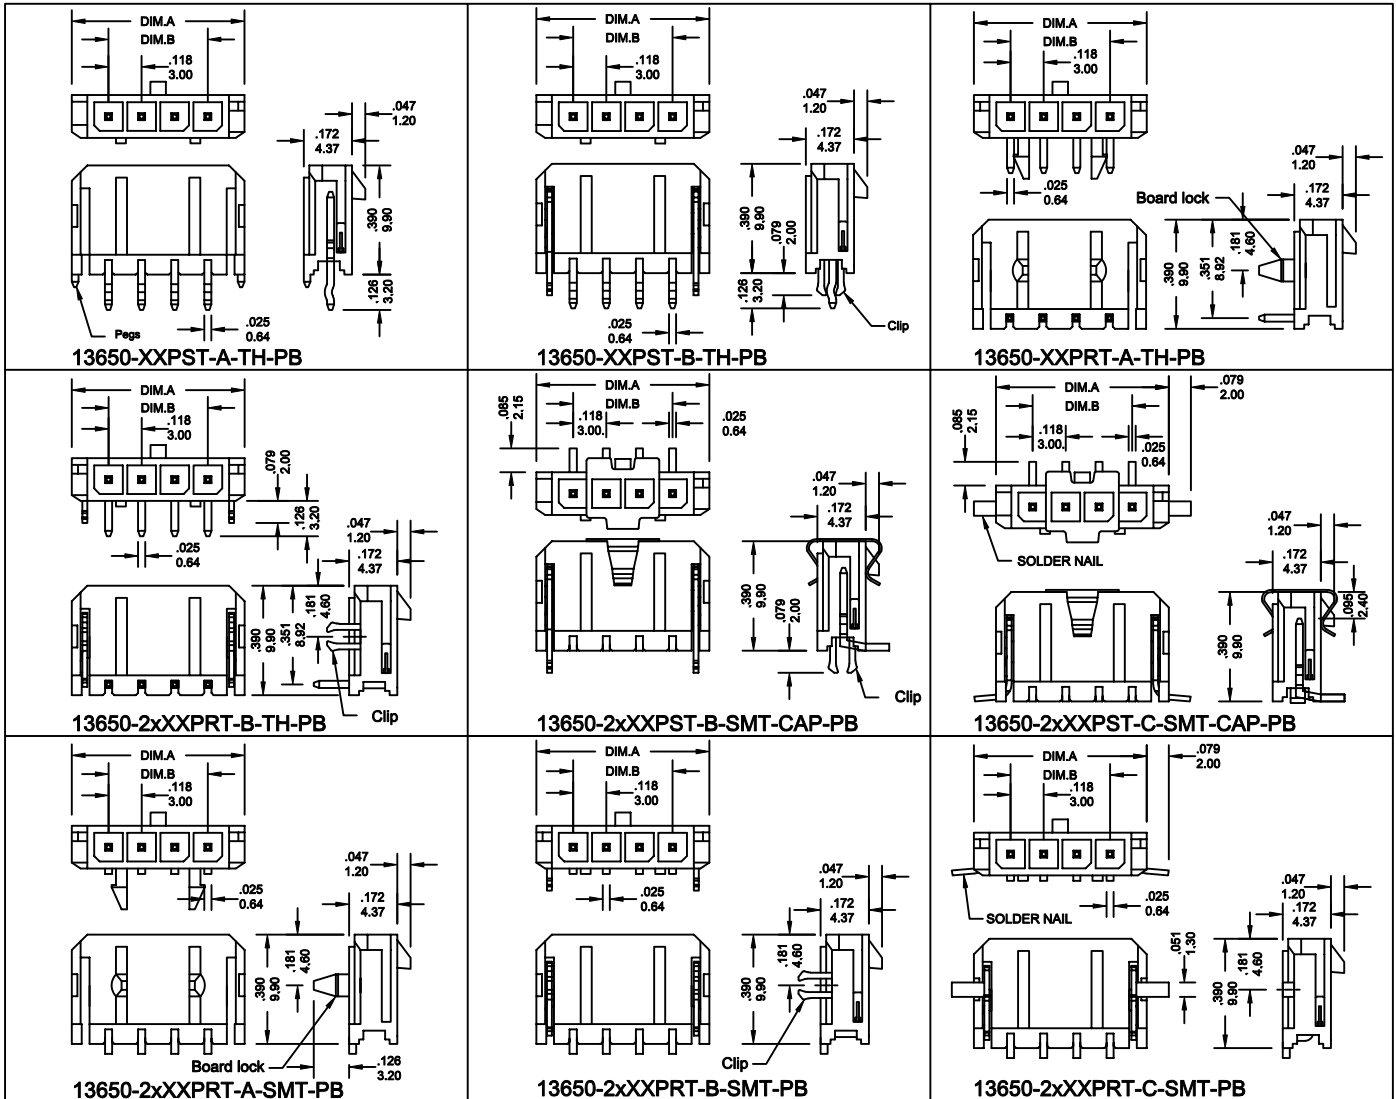

Ordering Information 13650 Series

Series No.	No. of Contacts	Contact Type	Contact Plating	Other Options	P.C.B Mount		
13650	- 02P	S	T	- B	- SMT	- CAP	- PB
13650 Series	02P ~ 12P	S: STRAIGHT R: RIGHT ANGLE	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	A: Straight with Pegs : Right Angle with Board Lock B: Straight with Pegs / Clip : Right Angle with Clip C: Straight with Solder Nail : Right Angle with Solder Nail	TH: Through Type SMT: SMT Type	With CAP	RoHs
* PIN LENGTH CAN BE CHANGED TO CUSTOM'S SPECIFICATION							

Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.380 9.65	.118 3.00	3	.498 12.65	.236 6.00	4	.616 15.65	.354 9.00	5	.734 18.65	.472 12.00
6	.852 21.65	.591 15.00	7	.971 24.65	.709 18.00	8	1.089 27.65	.827 21.00	9	1.207 30.65	.945 24.00
10	1.325 33.65	1.063 27.00	11	1.443 36.65	1.181 30.00	12	1.561 39.65	1.299 33.00			