

## .165" (4.20mm) Dual Row Housing

### 15557 Series (Receptacle)


#### FEATURES:

- . 2-24 Circuits
- . Positive Housing locks
- . Nylon 66 [UL 94V-2] or [UL 94V-0], Nature
- . 10 milliohm contact resistance
- . Low engagement force terminal
- . Fully isolated terminals
- . Accepts double cantilever crimp terminal [15557-TH-T]

#### SPECIFICATIONS:

- . Current rating: 9A AC, DC Per circuit
- . Voltage rating: 600 (RMS)
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing  
/20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .070"[1.78mm] max

UNIT: INCH  
MM

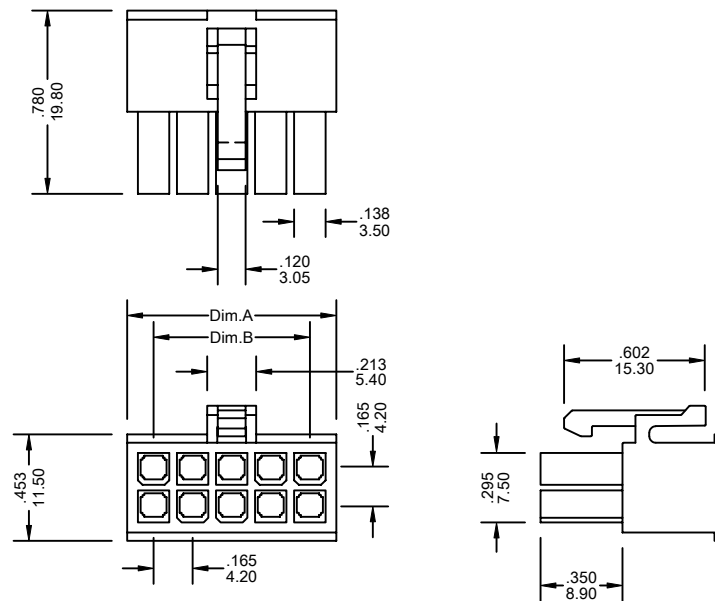

### Ordering Information 15557 Series

Series No.	No. of Contacts	Material	
15557	- 2X07P	- V0	- A
15557 Series	2X01P ~ 2X12P	V0: UL 94V-0,Nature V2: UL 94V-2,Nature	RoHs

### Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.213 5.40	—	4	.378 9.60	.165 4.20	6	.543 13.80	.331 8.40

\* FOR CIRCUIT SIZES 8 THROUGH 24 ADD .165" OR 4.20MM FOR EACH ADDITIONAL PIN.