## 1580-TF Series

### FEATURES:

- . 1580-TF-T Series Mates with VEN [1580-F] and ,[1580-FA] ,[1581-F] female connector
- . Accepts AWG 18-26 wire range
- . Material is Brass
- . Qty/Reel: 7K PCS
- .

Wire Gauge (AWG)	18	20	22	24	26
Pull Out Force (lb)	20	15	10	8	5

## **Ordering Information**

Series No.	Material	Contact Plating	
1580-TF -	TBS -	. т.	PB
1580-TF Series	TBS: Brass TPS: Phos.Bronze	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	RoHs

## 1580-TM Series

#### FEATURES:

- . 1580-TM-T Series Mates with VEN [1580-M] and ,[1580-MA] ,[1581-M] ,[1581-MA] male connector
- . Accepts AWG 18-26 wire range
- Material is Brass
- . Qty/Reel: 7K PCS


Wire Gauge (AWG)	18	20	22	24	26
Pull Out Force (lb)	20	15	10	8	5

# **Ordering Information**

Series No.	Material	Contact Plating	
1580-TM .	. TBS .	. т.	PB
1580-TM Series	TBS: Brass TPS: Phos.Bronze	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	RoHs

UNIT: INCH

UNIT: INCH

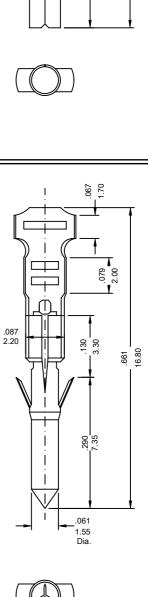

VEN

