

.079" (2.00mm) Center Housing

2040 Series


FEATURES:

- . 2-15 Circuits
- . .020" [0.50mm] square wire pin
- . Nylon 66, [UL 94V-0]
- . Accepts double cantilever crimp terminal[2040-T]
- . Mates with 2050 series wafer polarized

SPECIFICATIONS:

- . Current rating: 2A AC, DC
- . Voltage rating: 100V AC, Maximum
- . Temperature range: -25°C ~ +85°C
- . Contact resistance: Initial Value/10mΩ max
AFTER environmental testing
/20mΩ max.
- . Insulation resistance: 1,000 MΩ min
- . Withstand Voltage: 800V AC/minute
- . Applicable wires: AWG#24~#30

UNIT: INCH
MM

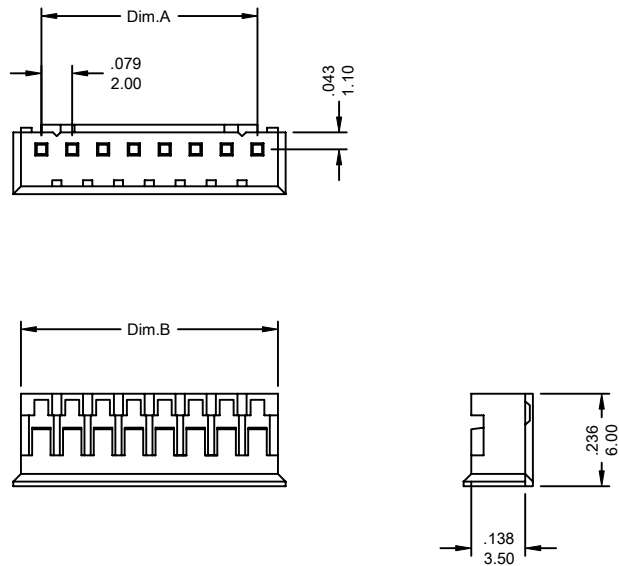

Ordering Information 2040 Series

Series No.	No. of Contacts	
2040	- 11P -	A
2040 Series	02P ~ 15P	RoHs

Dimensional Information

Circuits	Dim.A± 0.008 0.20	Dim.B± 0.010 0.25	Circuits	Dim.A± 0.008 0.20	Dim.B± 0.010 0.25	Circuits	Dim.A± 0.008 0.20	Dim.B± 0.010 0.25
02	.079 2.00	.183 4.65	03	.157 4.00	.262 6.65	04	.236 6.00	.341 8.65
05	.315 8.00	.419 10.65	06	.394 10.00	.498 12.65	07	.472 12.00	.577 14.65
08	.551 14.00	.656 16.65	09	.630 16.00	.764 18.65	10	.709 18.00	.813 20.65
11	.787 20.00	.892 22.65	12	.866 22.00	.970 24.65	13	.945 24.00	1.049 26.65
14	1.024 26.00	1.128 28.65	15	1.102 28.00	1.207 30.65			