

# .100" (2.54mm) Center Crimp Terminal Housing

## 2492 Series


### FEATURES:

- . 2-25 Circuits
- . With locking ramp or without locking ramp
- . Nylon 66+15% Glass Fiber [UL 94-0]
- . Mates with .025" [0.64mm] pins
- . Accepts double cantilever crimp terminal [2492-T]
- . Terminal retention to housing 6.6lbs [3.0kg] minimum

### SPECIFICATIONS:


- . Current rating: 3A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C .
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing /20mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand voltage: 1500V AC/minute
- . Applicable wire: AWG #30 ~ #22

UNIT: INCH  
MM

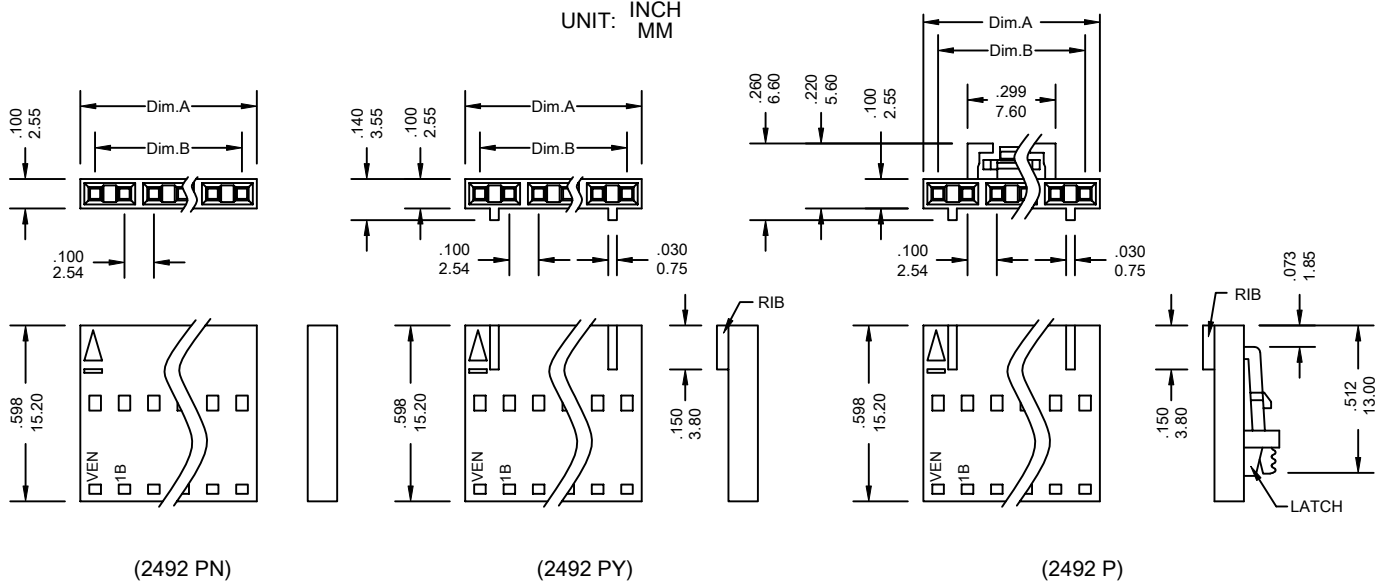

## Ordering Information 2492 Series

Series No.	No. of Contacts	Latch and Rzbs	
2492	- 04	PN	- A
2492 Series	02 ~ 25	PN: Without Latch and Ribs PY: With Ribs P: With Latch and Ribs	RoHs

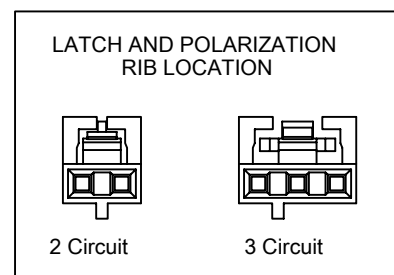

## Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.200 5.08	.100 2.54	3	.300 7.62	.200 5.08	4	.400 10.16	.300 7.62

2492 Series

\* FOR CIRCUIT SIZES 5 THROUGH 25 ADD .100" OR 2.54MM FOR EACH ADDITIONAL PIN.