

.098" (2.50mm) Center Crimp Terminal Housing

2560 Series


FEATURES:

- . 2-20 Circuits
- . With locking ramp
- . Nylon [UL 94V-0]
- . Mates with .025"[0.64mm] pins
- . Accepts double cantilever crimp terminal [2560-T]
- . Terminal retention to housing 4.4lbs [2.0Kg] minimum
- . Mates with 2660 housing

SPECIFICATIONS:

- . Current rating: 3A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand voltage: 1500V AC/minute
- . Applicable wires: #30 ~ #22

UNIT: INCH
MM

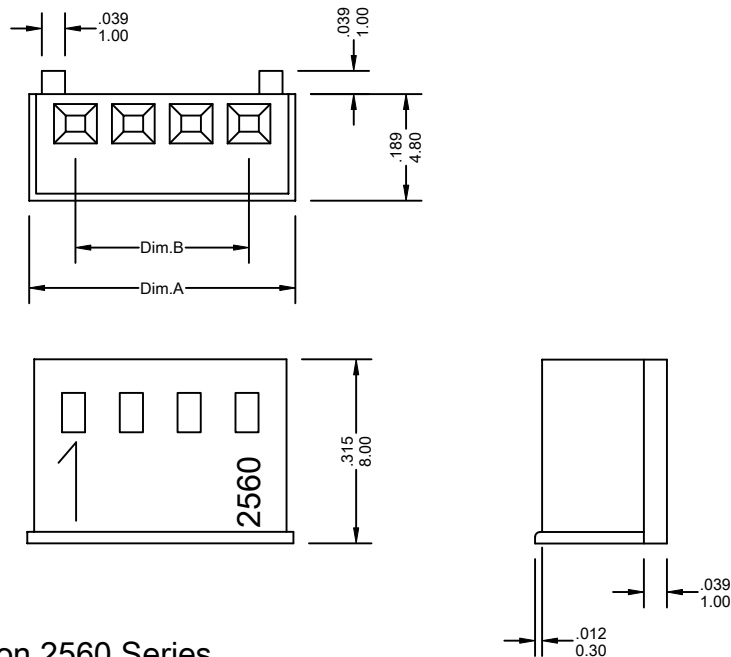

Ordering Information 2560 Series

Series No.	No. of Contacts	
2560	- 04P	- A
2560 Series	02P ~ 20P	RoHs

Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.218 5.54	.098 2.50	3	.317 8.04	.197 5.00	4	.415 10.54	.295 7.50
2560 Series * FOR CIRCUIT SIZES 5 THROUGH 20 ADD .098" OR 2.50MM FOR EACH ADDITIONAL PIN.								