

.098" (2.50mm) Fully Shrouded Headers


2566 Series

FEATURES:

- . 2-20 Circuits
- . Tin plated brass pins
- . [UL 94V-0] Nylon 66
- . .027"[0.70mm] Right angle or staight round pins
- . Mates with [2564] housing
- . Polarized
- . Friction lock


SPECIFICATIONS:

- . Current rating: 3A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -25°C ~ +85°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand voltage: 1000V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

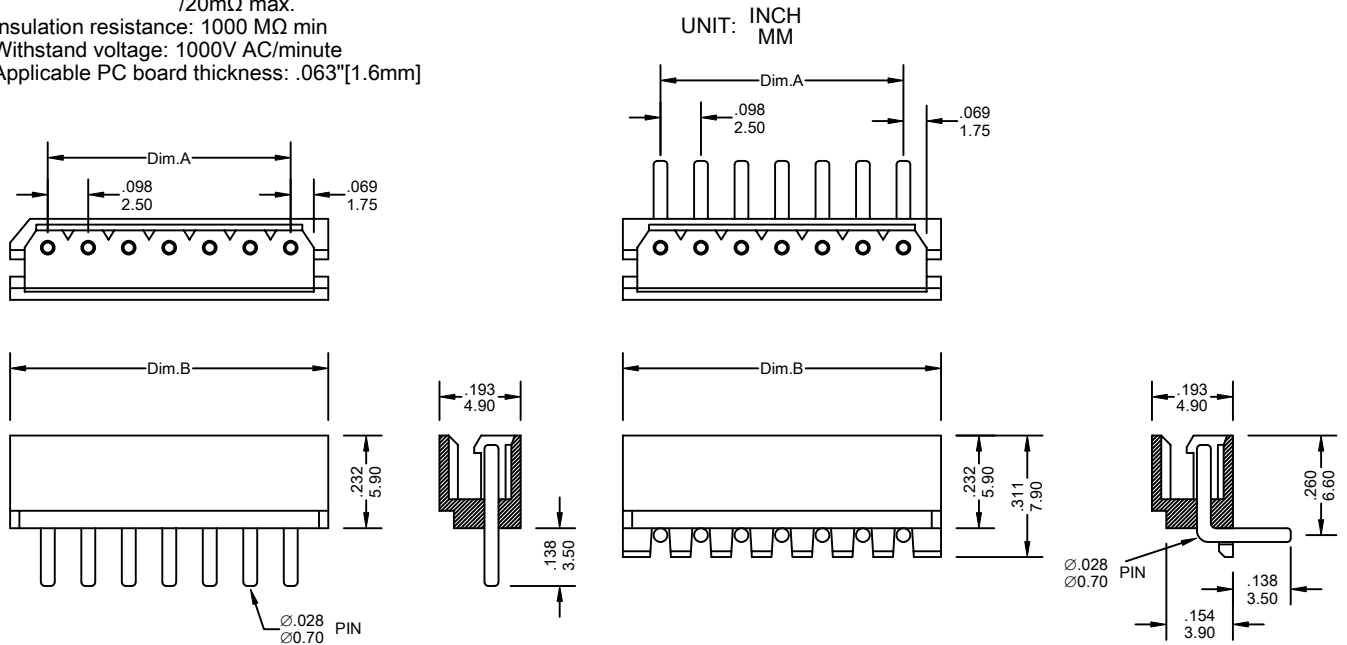

Ordering Information 2566 Series

Series No.	No. of Contacts	Contact Type	Contact Plating	
2566	- 04P	S	T	- PB
2566 Series	02P ~ 20P	S: Straight R: Right Angle	T: Tin G1: Gold Flash G5: 5u" Gold G10: 10u" Gold G15: 15u" Gold G30: 30u" Gold [G: Full Gold]	RoHs
* PIN LENGTH CAN BE CHANGED TO CUSTOM'S SPECIFICATION				



Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.098 2.50	.291 7.40	3	.197 5.00	.390 9.90	4	.295 7.50	.488 12.40
2566 Series * FOR CIRCUIT SIZES 5 THROUGH 20 ADD .098" OR 2.50MM FOR EACH ADDITIONAL PIN.								