

## .156" (3.96mm) Center Housing Lock


### 3967 Series

#### FEATURES:

- . 2-12 Circuits
- . Mates with .045" [1.14mm] Squire wire pins
- . Nylon, [UL 94V-0]
- . With Lock
- . Accepts double cantilever crimp terminal [3967-T]
- . Terminal retention to housing 8lbs. [3.63kg] minimum

#### SPECIFICATIONS:

- . Current rating: 7A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing  
/20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

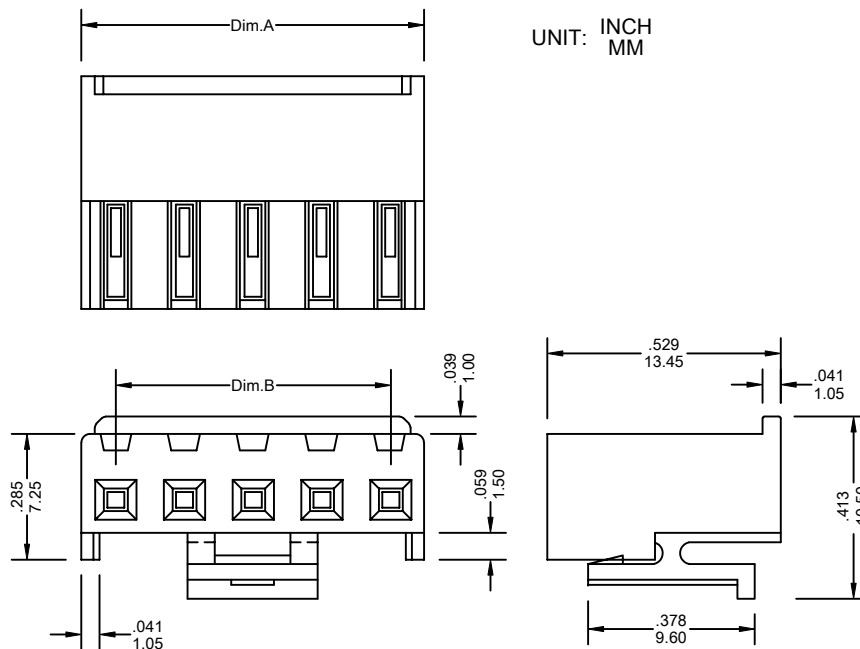

UNIT: INCH  
MM

### Ordering Information 3967 Series

Series No.	No. of Contacts	
3967	04P	- A
3967 Series	02P ~ 12P	RoHs

### Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.309 7.86	.156 3.96	3	.465 11.82	.312 7.92	4	.621 15.78	.468 11.88

3967 Series

\* FOR CIRCUIT SIZES 5 THROUGH 12 ADD .156" OR 3.96MM FOR EACH ADDITIONAL PIN.