

3967-T Series

FEATURES:



- . 3967-T Series Mates with VEN [3967] Series female connector
- . Accepts AWG 18-26 wire range
- . Material is Brass or Phos. Bronze
- . Qty/Reel: 4 K PCS

Wire Gauge (AWG)	18	20	22	24	26
Pull Out Force (lb)	20	15	10	8	6

Ordering Information

Series No.	Material	Contact Plating	
3967-T	BS	T	PB
3967-T Series	BS: Brass PS: Phos.Bronze	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	RoHs

UNIT: INCH
MM

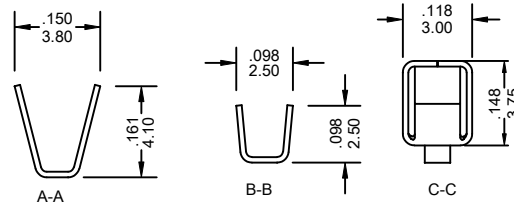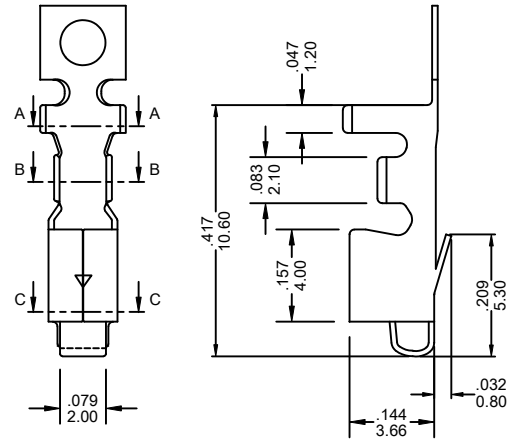

V6622-T Series

FEATURES:


- . Secures wires to P.C board before wave soldering
- . Rapid and economical means of hand wiring P.C. boards
- . wire solders directly to P.C boards
- . No additional contact resistance
- . Recommended P.C board hole diameter .070 +.001/-0 (1.8+0.1/-0)
- . Accepts AWG 18-24 wire range
- . Material is Brass
- . Qty/Reel: 5K PCS

Wire Gauge (AWG)	18	20	22	24
Pull Out Force (lb)	20	15	12	8

Ordering Information

Series No.	Material	Contact Plating	
V6622-T	BS	T	PB
V6622-T Series	BS: Brass	Tin Plated 100u"	RoHs

UNIT: INCH
MM

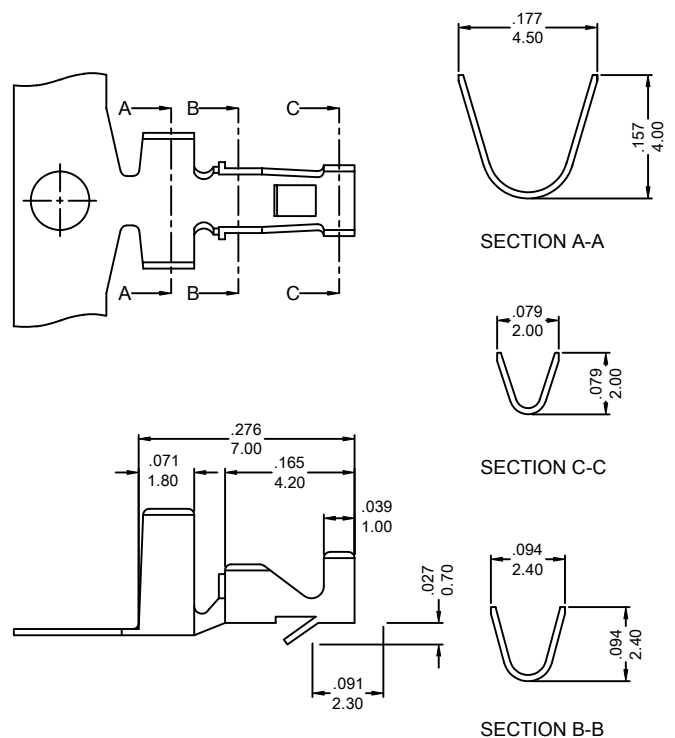

SECTION A-A

SECTION C-C

SECTION B-B