

.130" (3.30mm) P.C.Board Connector



6803L.6804L Series


FEATURES:

- . 7.10 Circuits
- . NYLON 6T
- . Designed for parallel and perpendicular board stacking, also for PCB-to-harness and PCB-to-chassis connection
- . Stackable side-to-side on .079"X.079" [2.00mmX2.00mm] grid
- . Mates with .0197" [0.50mm] square pins
- . Mounted on a board right angle headers, and straight headers

SPECIFICATIONS:


- . Current rating: 2A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~+ 105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063" [1.6mm]

UNIT: INCH
MM

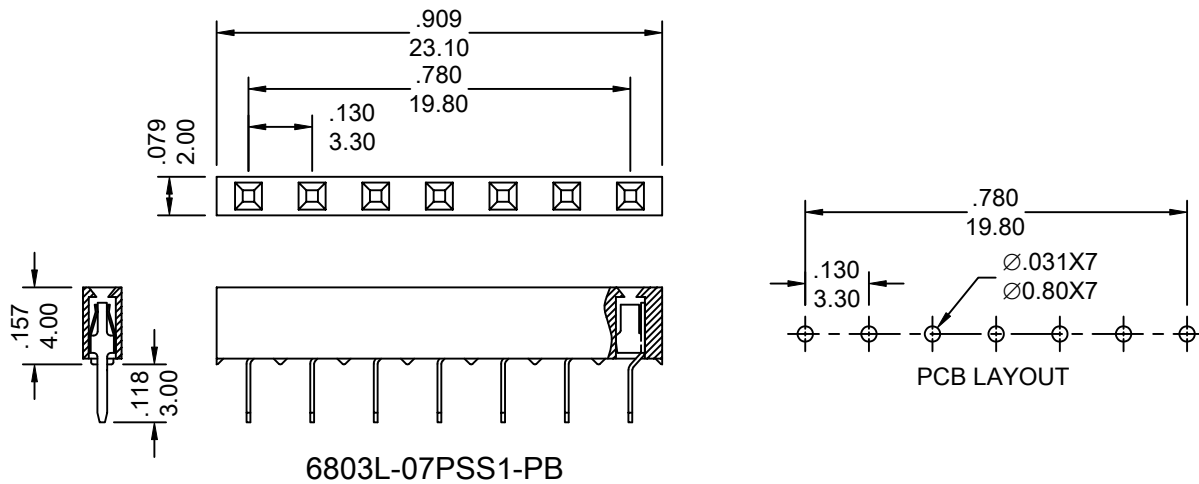

Ordering Information 6803L Series

Series No.	No. of Contacts	Contact Type	Contact Plating	
6803L	- 07P	S	S1	- PB
6803L Series	07P	S: Straight	S1: Gold Flash	RoHs

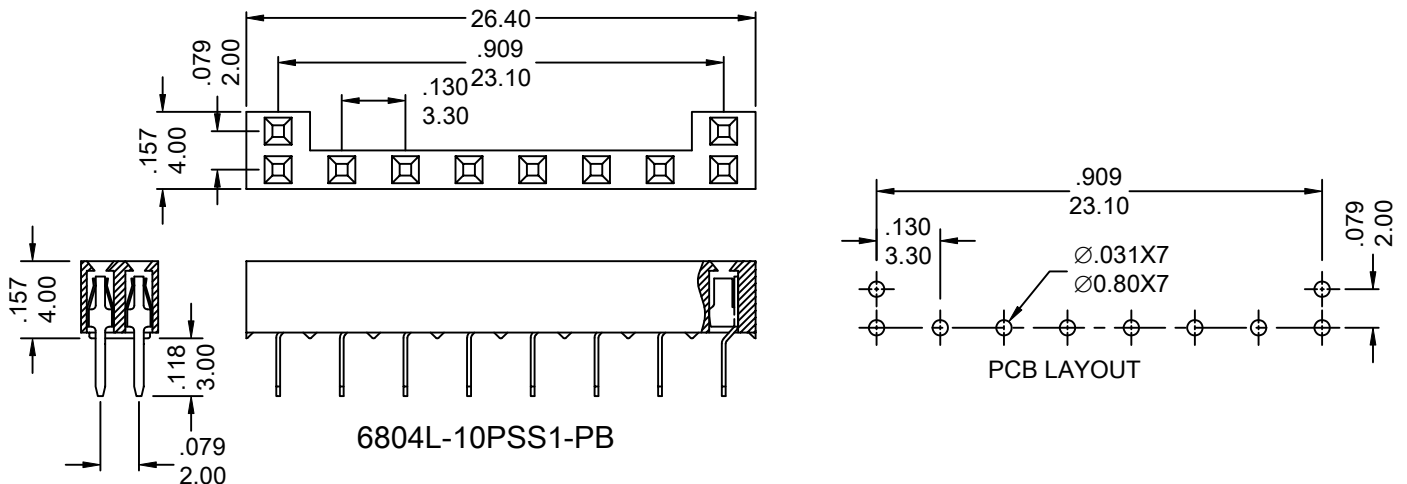

Ordering Information 6804L Series

Series No.	No. of Contacts	Contact Type	Contact Plating	
6804L	- 10P	S	S1	- PB
6804L Series	10P	S: Straight	S1: Gold Flash	RoHs