

.049" (1.25mm) Center Crimp Terminal Housing

9225 Series


FEATURES:

- . 2-15 Circuits
- . Mates with .012" [0.30mm] Terminals wire pins
- . Nylon 66, [UL 94V-0]
- . Accepts double cantilever crimp terminal [9225-T]
- . Mates with 9226 series wafer polarized

SPECIFICATIONS:

- . Current rating: 1A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing
/20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 500V AC/minute
- . Applicable wires: AWG #32 ~ #26

UNIT: INCH
MM

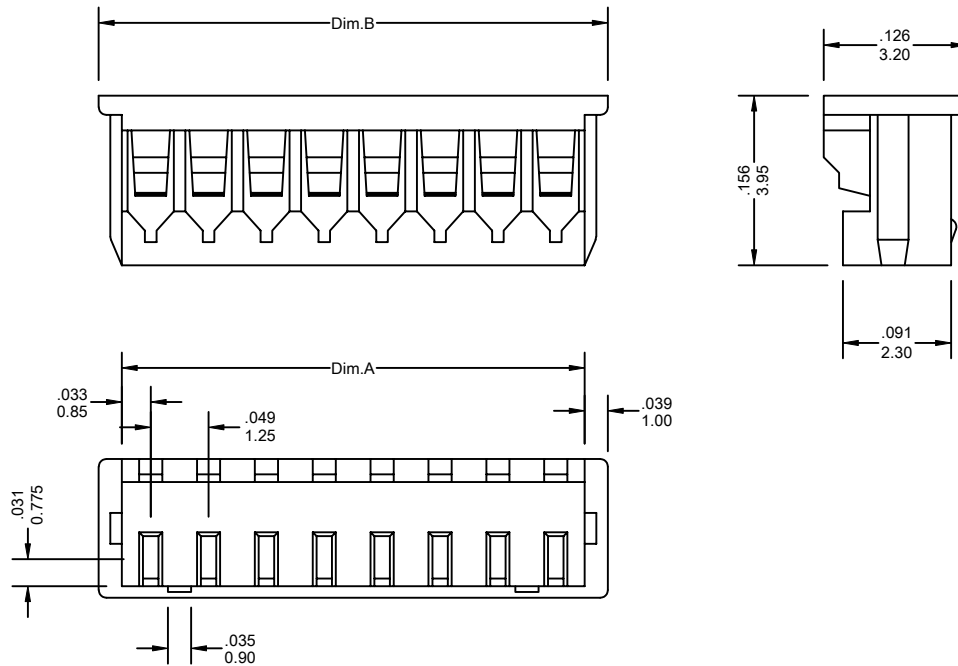

Ordering Information 9225 Series

Series No.	No. Of Contacts	
9225	- 07P	- A
9225 Series	02P ~ 15P	RoHs

Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.116 2.95	.167 4.25	3	.165 4.20	.217 5.50	4	.215 5.45	.266 6.75
9225 Series * FOR CIRCUIT SIZES 5 THROUGH 15 ADD .049" OR 1.25MM FOR EACH ADDITIONAL PIN.								