


Part	L	Tol	Q Min.	SRF	RDC	IDC
	(nH)	%		Min. (MHz)	MAX (Ω)	IN (mA)
CCFH1210-010	10 @50MHz	K	50 @500MHz	4100	0.08	1000
CCFH1210-012	12 @50MHz	K	50 @500MHz	3300	0.09	1000
CCFH1210-015	15 @50MHz	K	50 @500MHz	2500	0.1	1000
CCFH1210-018	18 @50MHz	J,K	50 @350MHz	2500	0.11	1000
CCFH1210-022	22 @50MHz	J,K	55 @350MHz	2400	0.12	1000
CCFH1210-027	27 @50MHz	G,J,K	55 @350MHz	1600	0.13	1000
CCFH1210-033	33 @50MHz	G,J,K	60 @350MHz	1600	0.14	1000
CCFH1210-039	39 @50MHz	G,J,K	60 @350MHz	1500	0.15	1000
CCFH1210-047	47 @50MHz	G,J,K	65 @350MHz	1500	0.16	1000
CCFH1210-056	56 @50MHz	G,J,K	65 @350MHz	1300	0.18	1000
CCFH1210-068	68 @50MHz	G,J,K	65 @350MHz	1300	0.2	1000
CCFH1210-082	82 @50MHz	G,J,K	60 @350MHz	1000	0.22	1000
CCFH1210-R10	100 @25MHz	G,J,K	60 @350MHz	1000	0.24	980
CCFH1210-R12	120 @25MHz	G,J,K	60 @350MHz	950	0.26	920
CCFH1210-R15	150 @25MHz	G,J,K	50 @100MHz	850	0.29	870
CCFH1210-R18	180 @25MHz	G,J,K	50 @100MHz	750	0.31	830
CCFH1210-R22	220 @25MHz	G,J,K	50 @100MHz	700	0.35	790
CCFH1210-R27	270 @25MHz	G,J,K	45 @100MHz	600	0.42	730
CCFH1210-R33	330 @25MHz	G,J,K	45 @100MHz	570	0.49	680
CCFH1210-R39	390 @25MHz	G,J,K	45 @100MHz	500	0.54	640
CCFH1210-R47	470 @25MHz	G,J,K	45 @100MHz	450	0.6	610
CCFH1210-R56	560 @25MHz	G,J,K	45 @100MHz	415	1	460
CCFH1210-R68	680 @25MHz	G,J,K	45 @100MHz	375	1.15	420
CCFH1210-R82	820 @25MHz	G,J,K	45 @100MHz	350	1.93	350
CCFH1210-1R0	1000 @25MHz	G,J,K	35 @50MHz	290	2.16	330
CCFH1210-1R2	1200 @7.9MHz	J,K	35 @50MHz	250	2.38	310
CCFH1210-1R5	1500 @7.9MHz	J,K	25 @50MHz	200	2.64	300
CCFH1210-1R8	1800 @7.9MHz	J,K	25 @50MHz	160	2.76	290
CCFH1210-2R2	2200 @7.9MHz	J,K	25 @50MHz	160	2.98	280
CCFH1210-2R7	2700 @7.9MHz	J,K	25 @25MHz	140	3.3	260
CCFH1210-3R3	3300 @7.9MHz	J,K	25 @25MHz	110	3.66	250
CCFH1210-3R9	3900 @7.9MHz	J,K	20 @25MHz	100	4	240
CCFH1210-4R7	4700 @7.9MHz	J,K	20 @25MHz	90	4.3	230

SPECIFICATION

TYPE = CCFH1210  
CONSTRUCTION = WOUND CERAMIC CHIP  
TERMINAL COATING = SILVER/GOLD FLASH  
OPERATING TEMP. = -40 TO +125 °C  
STORAGE TEMP = -55 TO +155 °C  
INSULATION RESISTANCE = 100MΩm. 100V TERMINAL-CORE  
DIELECTRIC STRENGTH = 250Vac TERMINAL-CORE  
HUMIDITY EFFECTS = L±5 @ 95%RH, 40 °C, 1HR  
= Q±5 @ 95%RH, 40 °C, 1HR  
PACKAGING = 2000PCS/REEL  
MARKING = NONE

NOTE

TOLERANCES G=2%; J=5%; K=10%.

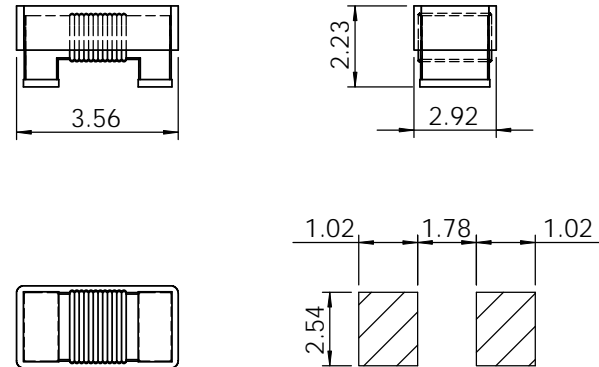

<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AIT COMPONENTS LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AIT COMPONENTS LTD IS STRICTLY PROHIBITED.	NAME	DATE	<b>AIT COMPONENTS LTD</b> www.aitcomponents.com
	DRAWN		
	CHECKED		
	ENG APPR.		TITLE:
MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ONE PLACE DECIMAL +/-0.3 TWO PLACE DECIMAL +/-0.13 ANGLE +/-1 DEGREE		<b>CCFH1210 WIRE WOUND COIL</b>
FINISH	DO NOT SCALE DRAWING	SIZE <b>A</b> DWG. NO. CCFH1210 WIRE WOUND COIL SCALE:1:1	REV. <b>00</b> SHEET 1 OF 1