


EDA Series



240W 单路输出
240W Single Output

Size (H*W*D):
124mm x 62mm x 119mm

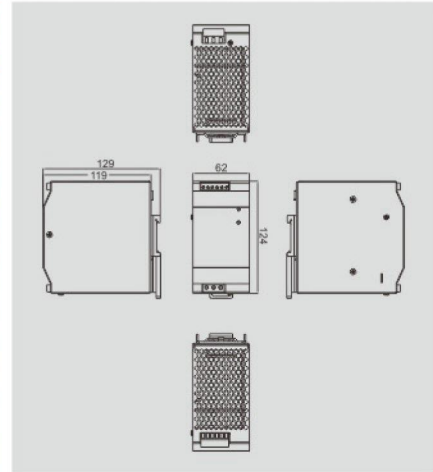

CE

Product features

- Universal AC input / full range
- PF >0.99@ 115VAC, >0.96@ 230VAC
- High efficiency, high reliability
- Power on indication
- Air cooling
- Built-in DC OK relay contact.
- Optional current Sharing.
- Protections: Overload / Over voltage / Over temperature / Short circuit
- 100% full load burn-in test
- 3 years warranty

Specifications

Input voltage	88~264VAC, 124~370VDC
Input frequency	47~63Hz
Inrush current	65A@230VAC
	35A@115VAC full load cold start
Hold up time	≥20ms@230VAC full load
Overload protection	105%~150% of full load, shut down output voltage with auto-recovery
Over voltage protection	120%~140%
Operating temperature	-25~70°C (refer to output derating curve)
Safety standard	EN60950-1, UL508
EMC standard	EN55022 Class B
	EN61000-6-2
Withstand voltage	I/P-O/P: 3kVAC, 1min
	I/P-FG: 1.5kVAC, 1min
	O/P-FG: 0.5kVAC, 1min
Weight	0.81kg/pcs

P/N	Output	Tol.	R & N	Effi.	Load Regulation	DC Adjustment Range
EDA-240-24	24V, 10A	± 1%	100mV	92%	± 1%	24V~28V
EDA-240-48	48V, 5A	± 1%	150mV	92%	± 1%	48V~53V