


VEN

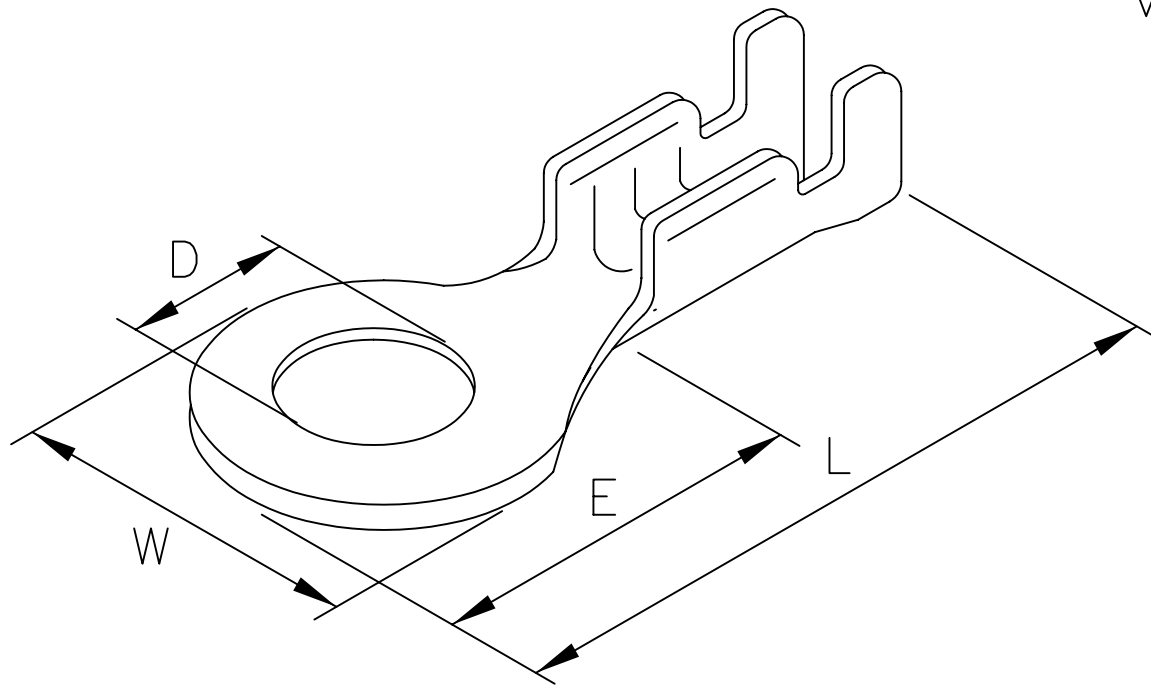

PART NO.	DIMENTION				WIRE RANGE		MATERIAL/ FINISH	STOCK THK	QTY/ RELL	N.W. Kgs	INSULATION O.D.mm
	W	E	L	D	AWG#	mm					
V1424BS-0	5.0	6.0	10.8	2.5	22-28	0.8-0.2	BRASS	0.4	20000	2.9	1.5-1.2
V1424BS-2	5.0	6.0	10.8	2.5	22-28	0.8-0.2	BRASS/TIN	0.4	20000	2.95	1.5-1.2
V14242BS-0	5.0	6.0	10.8	2.5	18-20	0.75-0.5	BRASS	0.4	15000	2.9	2.8-2.6
V14242BS-2	5.0	6.0	10.8	2.5	18-20	0.75-0.5	BRASS/TIN	0.4	15000	2.95	2.8-2.6
V1425BS-0	4.6	5.0	9.3	2.6	20-24	0.5-0.2	BRASS	0.3	20000	1.8	2.3-1.5
V1425BS-2	4.6	5.0	9.3	2.6	20-24	0.5-0.2	BRASS/TIN	0.3	-20000	1.85	2.3-1.5
V1426BS-0	4.6	5.0	9.3	2.25	20-24	0.5-0.2	BRASS	0.3	20000	1.9	2.3-1.5
V1426BS-2	4.6	5.0	9.3	2.25	20-24	0.5-0.2	BRASS/TIN	0.3	20000	1.95	2.3-1.5
V1431BS-0	7.0	8.3	16.0	3.2	14-22	2.0-0.3	BRASS	0.5	7500	3.3	3.8-1.5
V1431BS-2	7.0	8.3	16.0	3.2	14-22	2.0-0.3	BRASS/TIN	0.5	7500	3.35	3.8-1.5
V14311BS-0	7.0	8.3	16.0	3.7	14-22	2.0-0.3	BRASS	0.5	7500	3.25	3.8-1.5
V14311BS-2	7.0	8.3	16.0	3.7	14-22	2.0-0.3	BRASS/TIN	0.5	7500	3.3	3.8-1.5
V14312BS-0	7.0	8.3	16.0	3.2	14-22	2.0-0.3	BRASS	0.4	7500	2.4	3.8-1.5
V14312BS-2	7.0	8.3	16.0	3.2	14-22	2.0-0.3	BRASS/TIN	0.4	7500	2.45	3.8-1.5
V14313BS-0	7.0	8.3	16.0	3.7	14-22	2.0-0.3	BRASS	0.4	7500	2.35	3.8-1.5
V14313BS-2	7.0	8.3	16.0	3.7	14-22	2.0-0.3	BRASS/TIN	0.4	7500	2.4	3.8-1.5
V1432BS-0	6.0	7.4	13.0	3.2	16-20	1.3-0.5	BRASS	0.5	10000	3.2	4.0-2.0
V1432BS-2	6.0	7.4	13.0	3.2	16-20	1.3-0.5	BRASS/TIN	0.5	10000	3.2	4.0-2.0
V1433BS-0	8.6	11.2	19.0	3.4	14-22	2.0-0.3	BRASS	0.5	5000	2.9	3.8-1.5
V1433BS-2	8.6	11.2	19.0	3.4	14-22	2.0-0.3	BRASS/TIN	0.5	5000	2.95	3.8-1.5
V1439BS-0	5.0	6.0	10.8	3.2	22-28	0.8-0.2	BRASS	0.4	20000	2.75	1.5-1.2
V1439BS-2	5.0	6.0	10.8	3.2	22-28	0.8-0.2	BRASS/TIN	0.4	20000	2.8	1.5-1.2
V14392BS-0	5.0	6.0	10.8	3.16	18-20	0.75-0.5	BRASS	0.4	20000	2.9	2.8-2.6
V14392BS-2	5.0	6.0	10.8	3.16	18-20	0.75-0.5	BRASS/TIN	0.4	20000	2.9	2.8-2.6
V1441BS-0	8.6	11.2	19.0	4.3	14-22	2.0-0.3	BRASS	0.5	5000	2.9	3.8-1.5
V1441BS-2	8.6	11.2	19.0	4.3	14-22	2.0-0.3	BRASS/TIN	0.5	5000	2.95	3.8-1.5
V1445BS-0	7.0	8.3	16.0	4.3	14-22	2.0-0.3	BRASS	0.5	7500	3.05	3.8-1.5
V1445BS-2	7.0	8.3	16.0	4.3	14-22	2.0-0.3	BRASS/TIN	0.5	7500	3.1	3.8-1.5
V14451BS-0	7.0	8.3	16.0	4.3	14-22	2.0-0.3	BRASS	0.4	7500	2.55	3.8-1.5
V14451BS-2	7.0	8.3	16.0	4.3	14-22	2.0-0.3	BRASS/TIN	0.4	7500	2.55	3.8-1.5
V1447BS-0	8.6	11.2	19.0	4.3	14-22	2.0-0.3	BRASS	0.4	5000	2.08	3.8-1.5
V1447BS-2	8.6	11.2	19.0	4.3	14-22	2.0-0.3	BRASS/TIN	0.4	5000	2.13	3.8-1.5
V1456BS-0	8.6	11.2	19.0	5.4	14-22	2.0-0.3	BRASS	0.5	5000	2.6	3.8-1.5
V1456BS-2	8.6	11.2	19.0	5.4	14-22	2.0-0.3	BRASS/TIN	0.5	5000	2.65	3.8-1.5
V1458BS-0	8.6	11.2	19.0	5.4	14-22	2.0-0.3	BRASS	0.4	5000	2.2	3.8-1.5
V1458BS-2	8.6	11.2	19.0	5.4	14-22	2.0-0.3	BRASS/TIN	0.4	5000	2.25	3.8-1.5
V1462BS-0	12.0	15.0	22.5	6.4	14-20	2.0-0.5	BRASS	0.6	3500	3.1	3.8-1.5
V1462BS-2	12.0	15.0	22.5	6.4	14-20	2.0-0.5	BRASS/TIN	0.6	3500	3.15	3.8-1.5
V1458BS-0	12.0	15.0	22.5	8.4	14-20	2.0-0.5	BRASS	0.6	3500	2.65	3.8-1.5
V1458BS-2	12.0	15.0	22.5	8.4	14-20	2.0-0.5	BRASS/TIN	0.6	3500	2.7	3.8-1.5